



SPACING FOR MULTILANE ONE WAY TRAFFIC

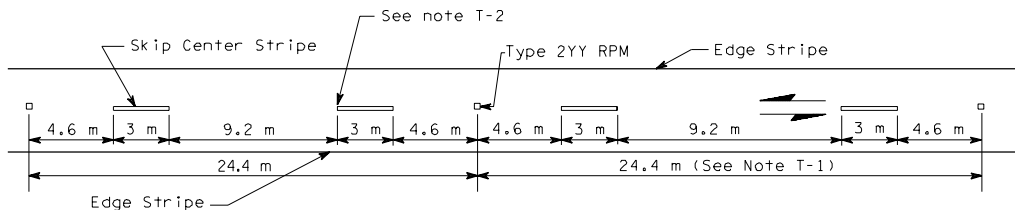

SPACING FOR TWO LANE TWO WAY TRAFFIC

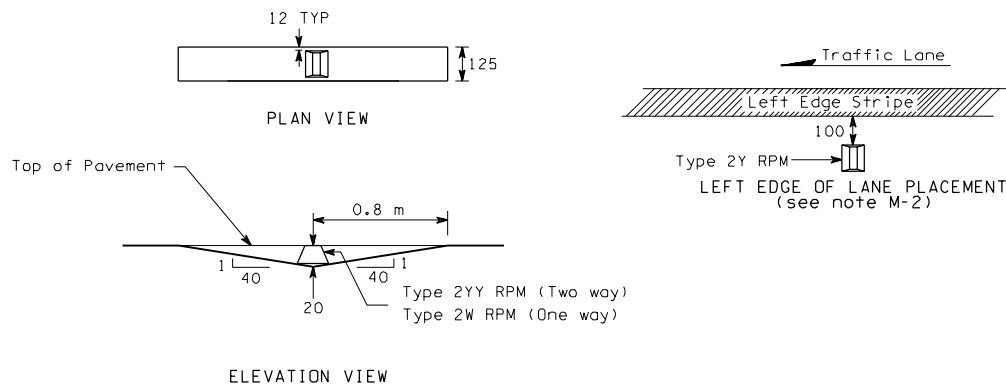

RECESSED PAVEMENT MARKER DETAILS

NOTES:

1. Recessed pavement markers, when specified, are installed at the locations shown for Type 2W RPM's on multilane one way roadways, and Type 2YY RPM's on two lane two way roadways.

MULTILANE ONE WAY TRAFFIC

- M-1. For lane lines, Type 2W RPM's shall be spaced at 24.4 meter intervals on tangents and horizontal curves with a radius of 1500 meters or more, and 12.2 meter intervals on horizontal curves having radii of less than 1500 meters.
- M-2. When specified, Type 2Y RPM's shall be placed outside the left edge stripe. Placement is shown on "Left Edge of Lane Placement".
- M-3. When specified, Type 2WR and Type 2YR RPM's are installed for the 300 meters in advance of off-ramp exits on freeways or grade intersections on multilane highways in lieu of Type 2W and 2Y RPM's. The red side of the RPM shall face the off-ramp.

TWO LANE TWO WAY TRAFFIC

- T-1. For center lines, Type 2YY RPM's shall be spaced at 24.4 meter intervals on tangents and horizontal curves with a radius of 1500 meters or more, and 12.2 meter intervals on horizontal curves having radii less than 1500 meters. Type 2YY RPM's are to be centered between skip stripes.

Type 2 RPM Raised Face Colors	
Type 2WR	white and red
Type 2YR	yellow and red
Type 2YY	yellow and yellow
Type 2W	white - one side only
Type 2Y	yellow - one side only
Type 1 RPM Colors	
Type 1W	white
Type 1Y	yellow

ALL DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE NOTED

SUPPLEMENTAL RAISED PAVEMENT MARKING DETAILS

STANDARD PLAN H-3

APPROVED FOR PUBLICATION

STATE DESIGN ENGINEER

DATE

WASHINGTON STATE DEPARTMENT OF TRANSPORTATION
OLYMPIA, WASHINGTON